



PCI/EP 02/12277

10/503771

22 SEP 2004



INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

REC'D 06 DEC 2002

WIPO

PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

20 September 2002

**BEST AVAILABLE COPY**

The  
Patent  
Office

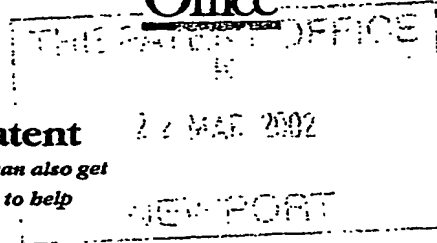

1/77  
22 MAR 2002  
P01/7700 0.00-0206732.0

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

SC0983EM/SPP/GBRI/VC/RAUSCH

2. Patent application number

(The Patent Office will fill in this part)

0206732.0

22 MAR 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MOTOROLA, INC  
1303 EAST ALGONQUIN ROAD,  
SCHAUMBURG, ILLINOIS 60196,  
U.S.A.

Patents ADP number (if you know it)

8281107001

If the applicant is a corporate body, give the country/state of its incorporation

U.S.A.

DELAWARE

4. Title of the invention

SELF-ROUTING, STAR-COUPLER-BASED COMMUNICATION NETWORK

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

POTTS SUSAN  
EUROPEAN INTELLECTUAL PROPERTY  
DEPARTMENT  
MIDPOINT  
ALENCON LINK  
BASINGSTOKE  
HAMPSHIRE RG21 7PL  
UK

Patents ADP number (if you know it)

7832577001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

☒ YES ☐ NO

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10 ✓  
Claim(s) 4 ✓  
Abstract 1 ✓  
Drawing(s) 4 + 4 R1

10. If you are also filing any of the following, state how many against each item.

Priority documents ✓  
Translations of priority documents ✓  
Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3 ✓  
Request for preliminary examination and search (Patents Form 9/77) 1 ✓  
Request for substantive examination (Patents Form 10/77) ✓  
Any other documents (please specify) 1 x FEE SHEET

11. I/We request the grant of a patent on the basis of this application.

Signature

POTTS SUSAN

Date

21/3/02

12. Name and daytime telephone number of person to contact in the United Kingdom

SUSAN POTTS 01256-790591

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.  
b) Write your answers in capital letters using black ink or you may type them.  
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.  
d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.  
e) Once you have filled in the form you must remember to sign and date it.  
f) For details of the fee and ways to pay please contact the Patent Office.

SELF-ROUTING, STAR-COUPLER-BASED COMMUNICATION NETWORK

**Field of the Invention**

5

This invention relates to communication networks and particularly to communication in real-time systems.

10 **Background of the Invention**

In the field of this invention it is known that fault-tolerance is a ubiquitous requirement in order to cope with communication errors in such systems.

15

It is known to provide redundant communication channels, which may be used in the event of failure of a primary communication channel. However, due to technical/economical constraints (increased cost incurred by redundant cabling and additional node interfaces) the number of channels is limited to two in known systems such as the established 'Time-Triggered Protocol' (TTP) and the more-recently proposed 'FlexRay' fault-tolerant real-time automotive communication systems.

25

It is also known to use intelligent network routers, which can intelligently re-route data transfer in the event of failure in a network link. However, equipping network star couplers (e.g., in systems such as wide/local area networks WAN/LAN) with microprocessors increases the overall system cost significantly. In

30

addition such routers introduce a time delay, which may cause problems in distributed safety-critical applications.

5 Hence, in summary, prior art solutions have the disadvantages of high costs and/or of additional time  
delays in the communication path.

A need therefore exists for self routing highly available  
10 network architecture based on star couplers wherein the abovementioned disadvantage(s) may be alleviated.

#### ~~Statement~~ of Invention

15

In accordance with a first aspect of the present invention there is provided a self-routing network as claimed in claim 1.

20 In accordance with a second aspect of the present invention there is provided a star coupler as claimed in claim 9.

#### 25 Brief Description of the Drawings

One self-routing, highly-available network architecture based on star couplers incorporating the present invention will now be described, by way of example only,  
30 with reference to the accompanying drawings, in which:

FIG. 1 shows a block-schematic diagram of the network, illustrating links between star couplers and nodes of the network;

5        FIG. 2 shows a block-schematic diagram illustrating frame transfer between some of the star couplers and nodes of the network;

10       FIG. 3 shows a block-schematic diagram of a star coupler which may be used in the network of FIG. 1 and FIG. 2; and

15       FIG. 4 shows a timing diagram of the frame transfer illustrated in FIG. 2.

#### **Description of Preferred Embodiments**

Referring firstly to FIG. 1, a self-routing, highly-  
20       available, real-time network communication system 100 includes a set of spatially distributed nodes (N1-N15) that is interconnected by a star-based network (comprising star couplers S1-S4 whose interconnection is depicted by single-dash lines) channel providing a single  
25       route between any two of the nodes. The nodes communicate by exchanging frames, each of which contains a frame-start-sequence (FSS). As so far described, the system may be, for example, a 'FlexRay' communication system, and need not be described in further detail.

30

However, in distinction to a known 'FlexRay' communication system, the system 100 adds additional links L1, L2 and L3 (depicted by double-dash lines) between, respectively, the star couplers S3 and S4, the  
5 star couplers S1 and S4, and the star couplers S1 and S3. These additional connections between the star couplers

---

prevent partitioning of the network in the event of connection failures among star couplers by providing an alternative communication path. In the configuration  
10 shown in FIG. 1, the system 100 can withstand two such connection failures without loss of communication among the nodes. For the purpose of illustration an interruption 110 is marked in FIG. 1 between the star couplers S2 and S3.

15 As will be discussed in more detail below, the star couplers resolve frame collisions by choosing exactly one input (the first detected input frame) and routing it to the remaining outputs. Each of the star couplers performs  
20 this function by continuously scanning its input lines in search of a frame-start-sequence, in a similar manner to that in a known 'FlexRay' system. In a given network the shortest (in the sense of the fastest) connection between star couplers will be found automatically.

25 Reference is now also made to FIG. 2, which shows a portion of the system of FIG. 1, made up of the nodes N1, N2 & N7, the star couplers S1, S2 & S3, and the links therebetween (including the interruption 110). FIG. 2  
30 illustrates three cases:

---

Case 1 - A single input frame arrives (from the node N1) at the star coupler S2 on one of its inputs (e.g., on input 2), causing this input to be selected and causing the star coupler to output this frame on all others of its outputs.

Case 2 - Three input frames arrive at the star coupler S1 (e.g., on inputs 2, 3 and 4). In this case, of these inputs the input from the star coupler S2 (say, input 4) is selected, as it is the first to arrive.

Case 3 - At the star coupler S3, the input (e.g., input 1) from the star coupler S1 via the additional link L3 is selected, as it is the first to be detected (i.e., scanned) by the star coupler.

Diagnosis (i.e., fault detection) is a vital issue for providing real-time availability. In the system of FIG. 1 and FIG. 2, fault detection is achieved as follows. A star coupler (S1, S2, S3 or S4) shortens the frame for output (compared with a selected input frame) by removing or consuming bits from the frame-start-sequence within the star coupler. By analysing a received frame, a receiver node can detect the route taken by the received frame. Shortening the frame-start-sequence may be realized either by (a) internal time base/clock (for timing the occurrence of the predetermined amount of the frame-start-sequence), or (b) bit detection (for detecting the occurrence of the predetermined amount of the frame-start-sequence).



FIG. 3 shows a star coupler (such as the star coupler S1, S2, S3 or S4) 300, which has inputs (four of which are shown), outputs (four of which are shown), an input  
5 detector 310, a FSS shortener 320, and an output enabler 330. The input detector 310 (whose detailed structure  
will be apparent to a person of ordinary skill in the art, and need not be described further ) detects which of the inputs is receiving, or is the first to receive a  
10 frame-start-sequence, and selects this input. The selected input is applied to the FSS shortener 320 (as mentioned above, either an internal time base/clock or a bit detector - whose detailed structure will be apparent  
to a person of ordinary skill in the art, and need not be  
15 described further), which removes 2 bits (as will be described below) of the frame-start-sequence. The shortened FSS and the following frame data are applied to the output enabler 330, which applies the shortened FSS frame to all outputs other than that which was selected  
20 by the input detector 310.

An example of the fault detection procedure referred to above is shown in FIG. 2 (and also in FIG. 4, which will be referred to in more detail below), in which each star  
25 coupler removes 2 bits from the frame-start-sequence of a frame which traverses the star coupler.

In the example illustrated, node N1 transmits a frame with an 8-bit frame start sequence 210. From the 8-bit  
30 FSS frame 210, the star coupler S2 outputs a 6-bit FSS frame 220. From the 6-bit FSS frame 220, the star coupler

S1 outputs a 4-bit FSS frame 230. Since the path between the star couplers S2 and S3 is interrupted, node N7 receives a frame 240 (which, from node 1, has traversed star couplers S2, S1 and S3) with a remaining 2-bit frame-start-sequence as the frame had to pass three star couplers. In comparison, in the fault-free case if there were no interruption between the star couplers S2 and S3, the frame 240 received at node 7 (which, from node 1, would have traversed star couplers S2 and S3) would have a 4-bit frame-start-sequence. Thus, by determining the number of FSS bits in the received frame originating from the node N1, the node N7 can determine whether the frame travelled via the path N1-S2-S3-N7 (4-bit FSS) or the frame travelled via the path N1-S2-S1-S3-N7 (2-bit FSS).

Referring now also to FIG. 4, the behaviours of the star couplers S2, S1 and S3 are illustrated respectively for the three cases 1, 2 & 3 referred to above.

Thus, it can be seen that in case 1 (at the star coupler S2) 'Frame 1' arrives (from the node N1) at the input 2 of the star coupler. After a maximum signal detection time  $T_{in}$ , the input 'Frame 1' is selected, and no further input signal is then accepted. After a subsequent maximum time  $T_{out}$  to power up the outputs, the 'Frame 1' (now with 2-bits removed from its FSS) is output at each of the other outputs (outputs 1, 3 and 4) of the star coupler.

In case 2 (at the star coupler S1) 'Frame 2' (from the star coupler node N1 via the star coupler S2) arrives at

the input 4 of the star coupler, 'Frame 3' arrives at the input 3 of the star coupler, and 'Frame 4' arrives at the input 2 of the star coupler. After a maximum signal detection time  $T_{in}$ , the input 'Frame 2' is selected,  
5 since it the first to arrive, and no further input signal is then accepted. After a subsequent maximum time  $T_{out}$   
to power up the outputs, the 'Frame 2' (now with a further 2-bits removed from its FSS) is output at each of the other outputs (outputs 1, 2 and 3) of the star  
10 coupler.

In case 3 (at the star coupler S3) 'Frame 5' (from the star coupler node N1 via the star coupler S2 and the star coupler S1) arrives at the input 1 of the star coupler,  
15 and 'Frame 6' arrives at the input 4 of the star coupler. After a maximum signal detection time  $T_{in}$ , the input 'Frame 5' is selected, since it the first to be detected, and no further input signal is then accepted. After a subsequent maximum time  $T_{out}$  to power up the outputs,  
20 the 'Frame 5' (now with a further 2-bits removed from its FSS) is output at each of the other outputs (outputs 2, 3 and 4) of the star coupler.

It will be understood that the self-routing, highly-  
25 available network architecture based on star couplers described above provides the following advantages:

- improves the availability of the network by providing additional, alternative communication paths (L1, L2, L3)

- enables error detection by detecting if the header length (FSS) is shorter than for shortest path communication,
- automatic activation of alternative paths based on physical principle of propagation delay (since, if the alternative paths such as L1, L2, L3 are not needed, frames transferred via these redundant paths will not progress further because their longer propagation delay will prevent their frames being selected by further star couplers)
- no need for intelligent functions in the star couplers other than selecting the first message and cutting a defined number of FSS bits of the frame.

It will also be understood that variations to the above-described network will be apparent to a person of ordinary skill in the art without departing from the invention.

For example, although the star couplers are described as shortening the frame-start-sequence by 2 bits, the network may be implemented with star couplers which change the frame-start-sequence in any desired manner such that an interconnection failure may be diagnosed by analysing the frame-start-sequence. For example, the frame-start-sequence could be a special frequency (e.g. 50 MHz sine wave) or symbol to activate the input and the star coupler could change this frequency to 40 MHz at its output or would send a different symbol. The next star coupler could change the FSS from 40 to 30 MHz and so on, or would change the symbol again.

Also, for example, although the network has been described in the context of a 'FlexRay' communication system, the network may be implemented in any system  
5 employing a deterministic media access scheme such as TDMA (time division multiple access).

---

## Claims

1. A self-routing communication network, comprising:  
a plurality of nodes;  
5 a plurality of star couplers each having a plurality  
of inputs and a plurality of outputs; and  
communication paths coupled between the plurality of  
star couplers and the plurality of nodes for  
communication therebetween of frames of information,  
10 wherein  
the communication paths include at least one  
alternative communication path, and  
the star couplers include means for sensing which of  
its inputs first receives a frame of information and  
15 for passing only the frame of information first  
received.
2. The self-routing communication network of claim 1,  
wherein the frames of information each have a frame-  
20 start-sequence, and the star couplers further include  
means for changing the frame-start-sequence before  
outputting the frame such that an interconnection failure  
may be diagnosed by analysing the frame-start-sequence.
- 25 3. The self-routing communication network of claim 2,  
wherein the means for changing the frame-start-sequence  
comprises means for reducing the size of the frame-start-  
sequence by a predetermined amount.
- 30 4. The self-routing communication network of claim 3,  
wherein the predetermined amount comprises 2 bits.

5. The self-routing communication network of claim 3 or  
4, wherein the means for reducing the size of the frame-  
start-sequence comprise clock means for timing the  
5 occurrence of the predetermined amount of the frame-  
start-sequence.

---

6. The self-routing communication network of claim 3 or  
4, wherein the means for reducing the size of the frame-  
10 start-sequence comprise bit detection means for detecting  
the occurrence of the predetermined amount of the frame-  
start-sequence.

7. The self-routing communication network of any of the  
15 preceding claim, wherein the network is based on a  
deterministic media access scheme.

8. The self-routing communication network of any  
preceding claim, wherein the network is arranged for  
20 real-time communication.

---

9. A star coupler for use in a self-routing communication network having a plurality of nodes coupled via communication paths and a plurality of star couplers for communication between the nodes of frames of

5 information,

the star coupler having a plurality of inputs and a plurality of outputs,  
wherein

the star coupler includes means for sensing which of its  
10 inputs first receives a frame of information and for passing only the frame of information first received, and the frames of information each have a frame-start-sequence, and the star coupler further includes means for changing the frame-start-sequence in a predetermined  
15 manner before outputting the frame of information, whereby interconnection failure in the network may be diagnosed by analysing from the frame-start-sequence.

10. The star coupler of claim 9, wherein the means for  
20 changing the frame-start-sequence in a predetermined manner comprises means for reducing the size of the frame-start-sequence by a predetermined amount.

11. The star coupler of claim 10, wherein the  
25 predetermined amount comprises 2 bits.

12. The star coupler of claim 10 or 11, wherein the means for reducing the size of the frame-start-sequence comprise clock means for timing the occurrence of the  
30 predetermined amount of the frame-start-sequence.



13. The star coupler of claim 10 or 11, wherein the means for reducing the size of the frame-start-sequence comprise bit detection means for detecting the occurrence of the predetermined amount of the frame-start-sequence.

5

---

14. The star coupler of any one of claims 9-13, wherein the network is based on a deterministic media access scheme.

10 15. The star coupler of any one of claims 9-14, wherein the network is arranged for real-time communication.

16. A self routing highly available network architecture based on star couplers substantially as hereinbefore  
15 described with reference to the accompanying drawings.

17. A star coupler substantially as hereinbefore described with reference to the accompanying drawings.


---

**Abstract**

SELF-ROUTING, STAR-COUPLER-BASED COMMUNICATION NETWORK

5 A self-routing communication network (100) having: a plurality of nodes (N1-N15); a plurality of star couplers (S1-S4) each having a plurality of inputs and a plurality of outputs; and communication paths coupled between the plurality of star couplers and the plurality of nodes for  
10 communication therebetween of frames of information, including at least one redundant communication path (L1-L3), and the star couplers sensing which of its inputs first receives a frame and passing only the frame first received. The frames each have a frame-start-sequence  
15 (FSS), and the star couplers change the frame-start-sequence before outputting the frame of information e.g. by reducing the size of a frame's frame-start-sequence by a predetermined amount (e.g., 2 bits) , whereby interconnection failure may be diagnosed by analysing  
20 the frame-start-sequence.

This provides the following advantages: improves the availability of the network by providing additional communication paths (L1,-L3); error detection by FSS properties; automatic activation of redundant paths  
25 based on physical principle of propagation delay; no need for intelligent functions in the star couplers other than selecting the first message and cutting a defined number of FSS bits of the frame.

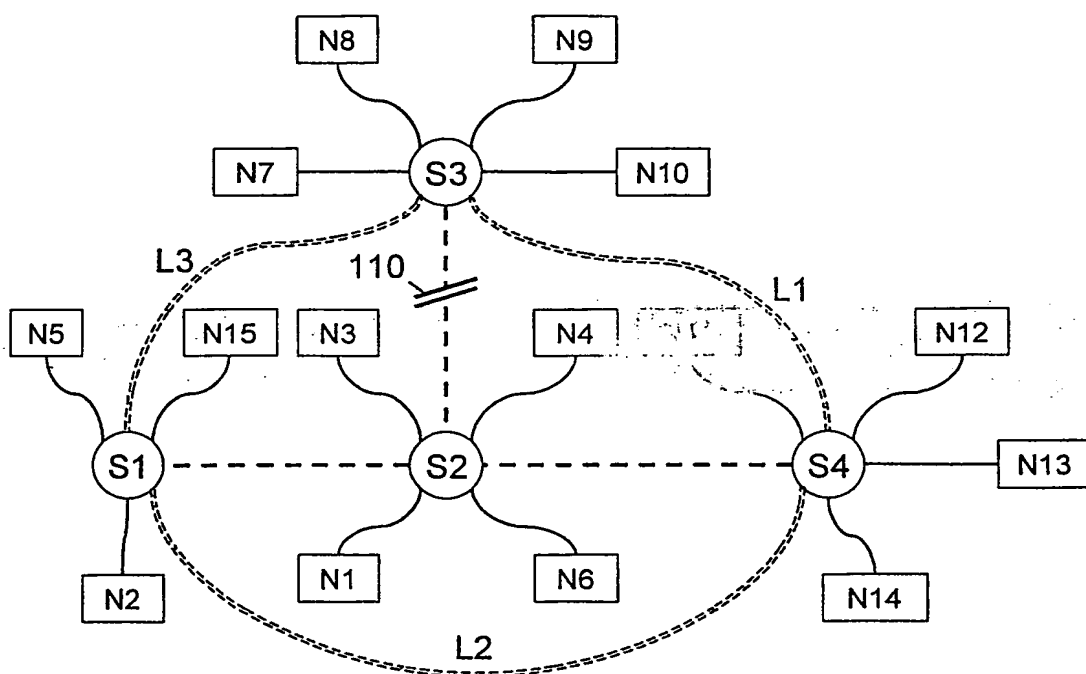

100

FIG. 1

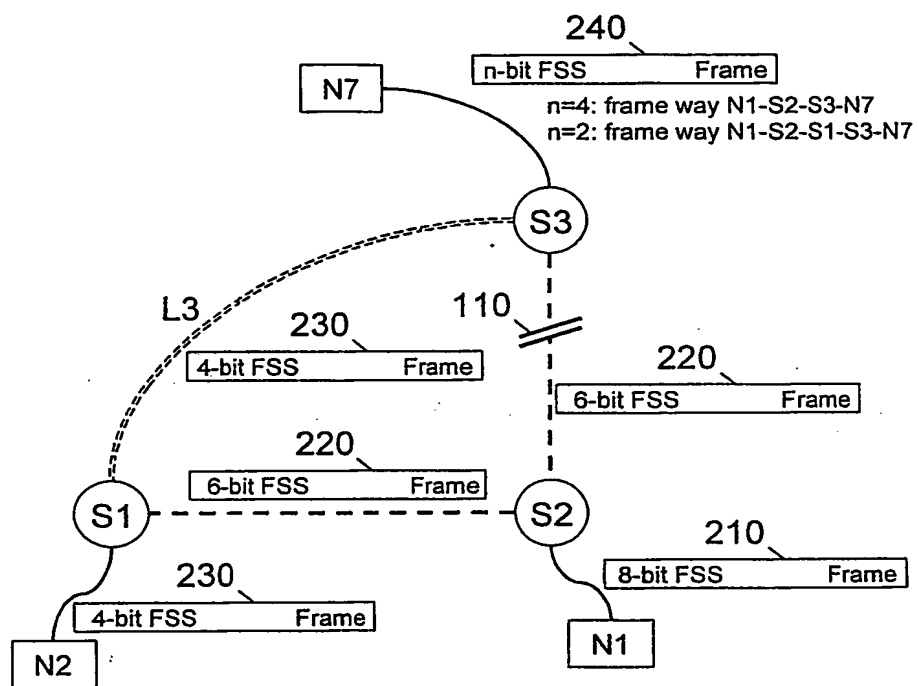


FIG. 2

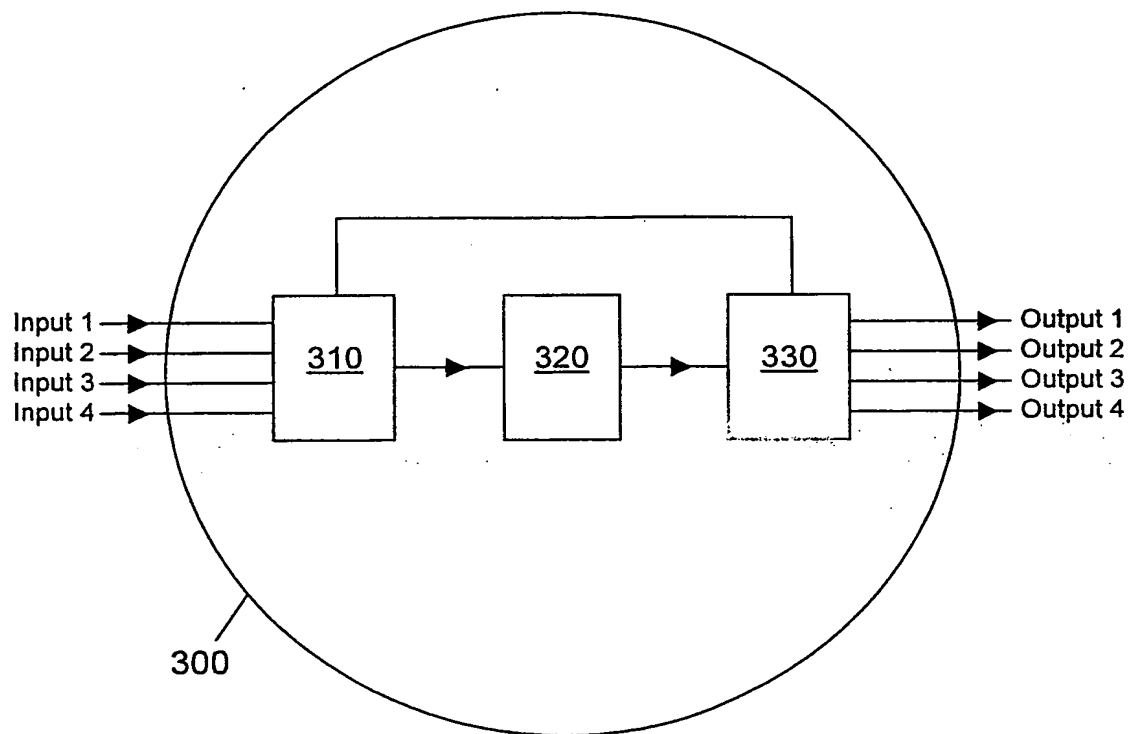


FIG. 3

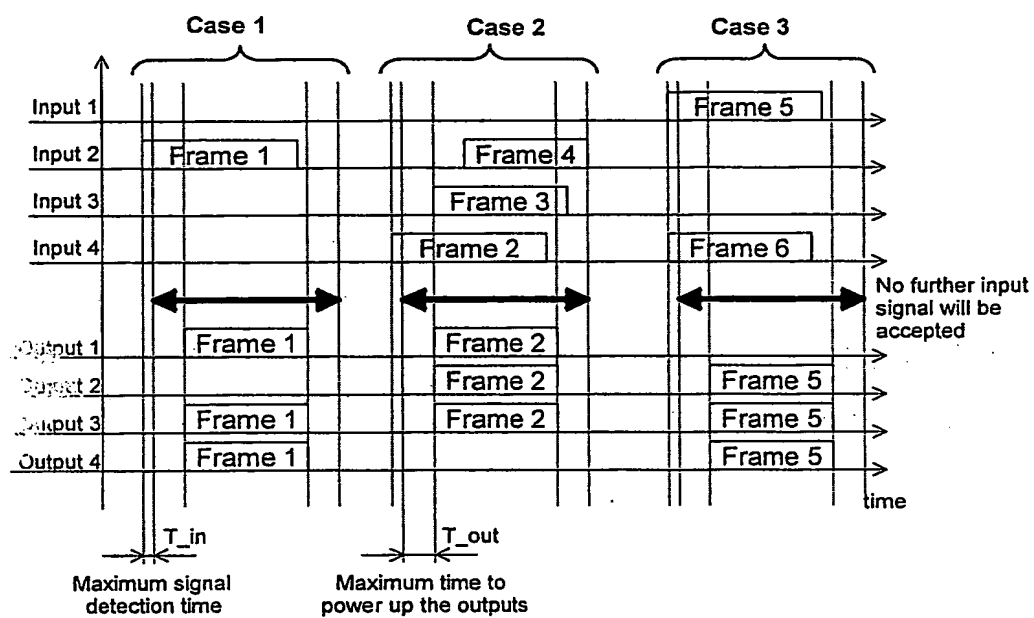


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**